

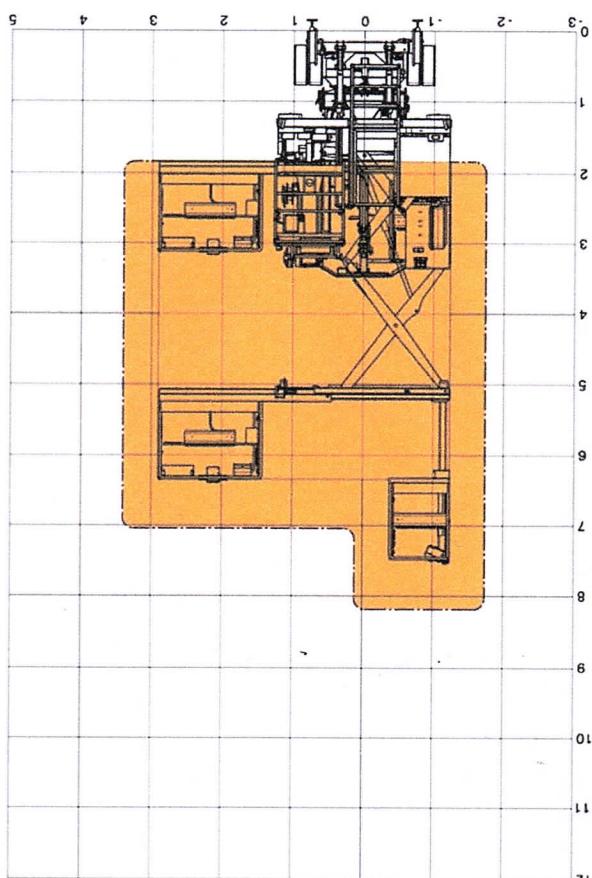
Max working height .....	11.25 m
Max working outreach .....	8.25 m
Platform dimensions .....	3.50 m
Basket dimensions .....	985x790 mm
Max payload in the basket .....	2500x1200 mm
Max payload .....	3 people or 350 kg
Relative rotation to the track centerline .....	90° / 38°
Gradient capability .....	Up to 57% on stable ground

**LIFTING BASKET**

Max working height .....	8.25 m
Max working outreach .....	3.50 m
Platform dimensions .....	2500x1200 mm
Basket dimensions .....	985x790 mm
Max payload .....	3 people or 350 kg

**SCISSOR PLATFORM**

Driver axle .....	X 1 NEOTEC EPV 06.25
Braked axles .....	X 2 with drum brakes
Diameter of rallyway wheels .....	Ø 450 mm
Max gradient .....	1/25 - 40%
Max cant .....	200 mm
Max working speed .....	8.5 kph
Max travelling speed .....	18 kph

**RAIL MODE**

Rubber track .....	X 2 : 2500 x 400 mm
Hydrostatic drive .....	1 motor/track
Off-road speed .....	From 0 to 2,5 kph
Gradient capability .....	Up to 57% on stable ground

**OFF-ROAD MODE**

PERKINS Liquid Cooled Diesel engine .....	36.3 kW
Dimensions .....	5445 x 2505 x 3272 mm

Weight in operation..... From 8.485 kg

Dimensions ..... 5445 x 2505 x 3272 mm |

PERKINS Liquid Cooled Diesel engine ..... 36.3 kW |

**TECHNICAL DATA**